

Netiquette 1241

Gamma 1298

Specifications

Contents

68% polyester
32% post-consumer recycled polyester

Weight

9.6 ± 1.0 oz./lin. yd.

Width

66" min. useable

Repeat

7.25" vertical | 14" horizontal
Random match

Treatment

polyester binder

Backing

none

Treatment

polyester binder

Cleaning Code

<p>Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.</p>

Performance



Breaking Strength (ASTM D5034)

250 lbf min. warp and 130 lbf min. fill

Tear (ASTM D2261)

15 lbf min. warp and fill

Colorfastness to light (AATCC 16.3 Option 3)

Grade 4 min. at 40 hours

Colorfastness to crocking (AATCC 8)

Grade 4 min. dry & Grade 3 min. wet


NRC of anechoic termination

1.00

NRC of fabric in front of anechoic termination

.95

Miscellaneous

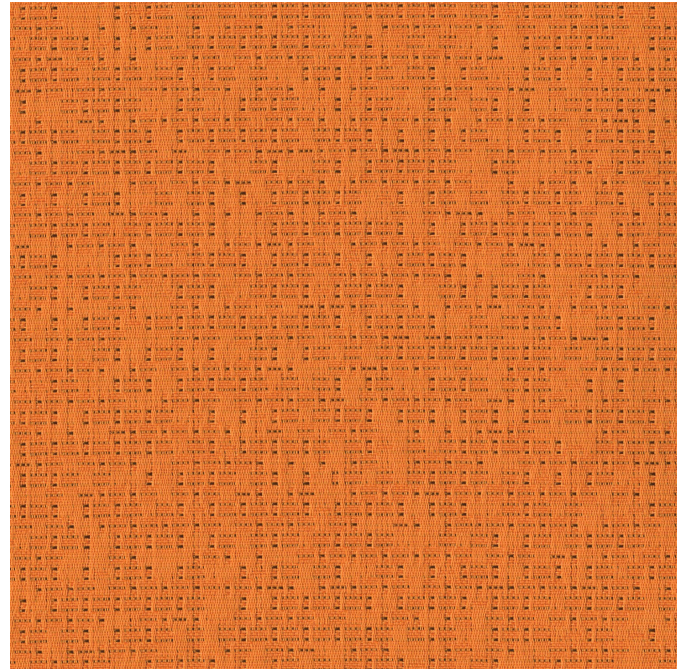

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications
(ISO 10534-2)

