

Studio 54 2966

Glam 7040

Specifications

Contents

100% polypropylene

Weight

12.8 ± 1.0 oz./lin. yd.

Width

66" min. useable

Repeat

.1" vertical, none horizontal

Treatment

polyester binder

Backing

none

Treatment

polyester binder

Cleaning Code

<p>Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May be cleaned with a 4:1 water-to-bleach solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners. Read the Cleaning & Disinfection Handbook</p>

Performance



Breaking Strength (ASTM D5034)

100 lbf min. warp and 250 lbf min. fill

Tear (ASTM D2261)

25 lbf min. warp and 55 lbf min. fill

Colorfastness to light (AATCC 16.3 Option 3)

Grade 4 min. at 40 hours

Colorfastness to crocking (AATCC 8)

Grade 4 min. dry & Grade 3 min. wet

Flammability

ASTM E84 Class I or A

NRC of anechoic termination

1.00

NRC of fabric in front of anechoic termination

.95


Miscellaneous

Every effort has been made to ensure color accuracy of the digital images, however, please order a sample before specification. Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Proudly woven in North America supporting our local communities.

Variation in texture and luster, due to the manufacturing process, is to be expected and is part of the inherent beauty of Studio 54.

Pre-Approved: Kimball.

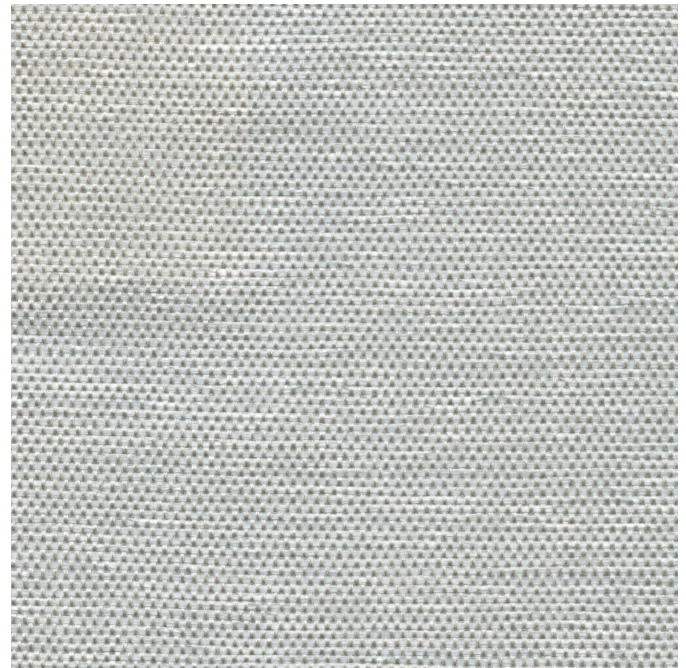

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

