# **Input** 5598

Crimson 1486

# **Specifications**

#### **Contents**

94% post-consumer recycled polyester 6% pre-consumer recycled polyester

#### Weight

 $10.1 \pm 1.0$  oz./lin. yd.

#### Width

54" min. useable

#### Repeat

2.5" vertical | 12.25" horizontal

## **Treatment**

none

#### Backing

none

# Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners. Read the <a</p>

href="https://www.guilfordofmaine.com/system/res/28/original/Guilford\_of\_Maine\_-\_Cleaning\_\_Disinfection\_Handbook.pdf?1596642657" target="\_blank">Cleaning & the companies of the

## **Performance**











## **Breaking Strength (ASTM D5034)**

290 lbf min. warp and 250 lbf min. fill

#### Tear (ASTM D2261)

15 lbf min. warp and 30 lbf min. fill

#### Seam Slippage (ASTM D4034)

110 lbf warp and 75 lbf fill

## Pilling resistance (ASTM D3511)

Class 4 min.

## Colorfastness to light (AATCC 16.3 Option 3)

Grade 4 min. at 40 hours

## Colorfastness to crocking (AATCC 8)

Grade 4 min. dry & Grade 3 min. wet

## Wyzenbeek Abrasion resistance (ASTM D4157)

100,000 double rubs cotton duck


### Flammability

CA Technical Bulletin 117-2013 Section 1

## **Miscellaneous**

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

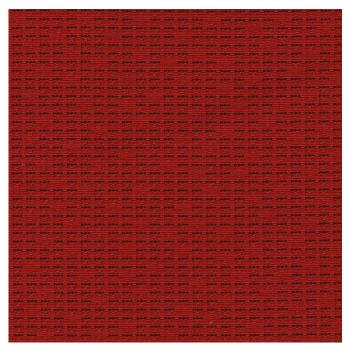



Terratex is a registered trademark of Duvaltex and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.

